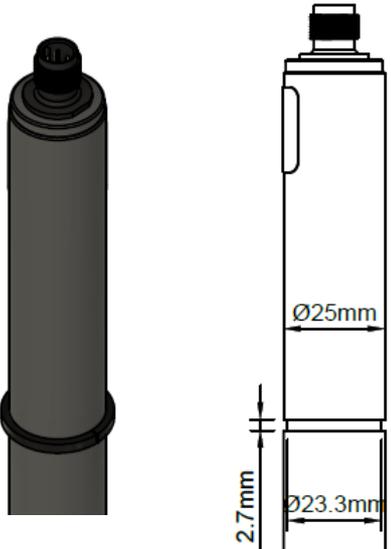


	<h1>TARAbase CD4.2</h1>
indicator	Chlorine dioxide
Application	Swimming pool water, drinking water, service water, process water The water must not contain any surfactants (tensides)!
appropriate chlorine dioxide production methods	e. g. – Acid/chlorite-method – Chlorine/chlorite-method
Measuring system	Membrane covered, amperometric 2-electrode system with electronic inside
Electronic	<p>Analog version:</p> <ul style="list-style-type: none"> - voltage output - not galvanically isolated electronics - analog internal data processing - output signal: analog (analog-out/analog) <p>Digital version:</p> <ul style="list-style-type: none"> - electronic is completely galvanically isolated - digital internal data processing - output signal: analog (analog-out/digital) or digital (digital-out/digital) <p>mA-version:</p> <ul style="list-style-type: none"> - current output analog - not galvanically isolated electronics - output signal: analog (analog-out/analog)
Information about the measuring range	<p>The actual slope of a sensor can vary production-related between 65% and 150% of the nominal slope</p> <p>Note: With a slope > 100% the measuring range is reduced accordingly. (Ex.: 150% slope → 67% of the specified measuring range)</p>
Slope drift At repeatability conditions (25 °C, pH 7,2 in drinking water)	approx. <-1% per month
Working temperature	Measuring water temperature: 0 ... +45 °C (no ice crystals in measuring water)
	Ambient temperature: 0 ... +55 °C
Temperature compensation	Automatically, by an integrated temperature sensor Sudden temperature changes must be avoided
Max. allowed working pressure	Operation without retaining ring: – 0.5 bar – no pressure impulses and/or vibrations
	Operation with retaining ring in TARAflow FLC: – 1.0 bar, – no pressure impulses and/or vibrations (see option 1)

	<h1>TARAbase CD4.2</h1>	
Flow rate (Incoming flow velocity)	approx. 15-30L/h (33 – 66 cm/s) in TARAflow FLC, small flow rate dependence is given	
pH-range	pH 1 – pH 12 or the beginning of decomposition of chlorine dioxide at/over pH 12	
Run-in time	First start-up approx. 1 h	
Response time	T ₉₀ : approx. 15 sec.	
Zero point adjustment	Not necessary	
calibration	At the device, by analytical determination	
interferences	Cl ₂ : factor 0.35 O ₃	
Absence of the disinfectant	Max. 24 h	
Connection	mV version: 5-pole M12, plug-on flange Modbus version: 5-pole M12, plug-on flange 4-20 mA version: 2-pole terminal or 5-pole M12, plug-on flange	
max. length of sensor cable (depending on internal signal processing)	analog	< 30 m
	digital	> 30 m are permissible Maximum cable length depends on application
Protection type	5-pole M12 plug-on flange: IP68 2-pole terminal with mA-hood: IP65	
material	Semipermeable membrane, PVC-U, ABS	
Size	diameter: approx. 25 mm Length: mV version approx. 190 mm (analog signal processing) approx. 205 mm (digital signal processing) Modbus version approx. 205 mm 4-20 mA version approx. 220 mm (2-pole-terminal) approx. 190 mm (5-pole-M12)	
Transport	+5 ... +50 °C (Sensor, electrolyte, membrane cap)	

	<h1>TARAbase CD4.2</h1>	
<p>storage</p>	<p>Sensor:</p>	<p>dry and without electrolyte no limit at +5 ... +40 °C</p>
	<p>Electrolyte:</p>	<p>in original bottle protected from sunlight at +5 ... +35 °C min. 1 year or until specified EXP-Date</p>
	<p>Membrane cap:</p>	<p>in original packing no limit at +5 ... +40 °C (used membrane caps can not be stored)</p>
<p>maintenance</p>	<p>Regularly control of the measuring signal, min. once a week The following specifications depend on the water quality: Change of the membrane cap: once a year (depending on the water quality) Change of the electrolyte: every 3 - 6 months</p>	
	<p>EMC tested RoHS compliant</p>	

<p>Option 1: Retaining ring</p>	<ul style="list-style-type: none"> - When operating with pressures >0.5 bar in TARAflow FLC - Dimensions retaining ring 29 x 23.4 x 2.5 mm, slitted, PETP - Different positions for groove selectable (on request) 	
--	--	--

Technical Data
1. CD4.2 (analog output, analog internal signal processing)

A potential-free electrical connection is necessary as the sensor electronic is not equipped with a galvanical isolation.

	Measuring range	resolution	Output Output resistance	Nominal slope	Voltage supply	Connection
	in ppm	in ppm		in mV/ppm		
CD4.2N-M12	0.05...20.00	0.01	0...-2000 mV 1 kΩ	-100	±5 - ±15 VDC 10 mA	5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: -U PIN4: signal GND PIN5: n. c.
CD4.2H-M12	0.005...2.000	0.001		-1000		

(Subject to technical changes!)

2. CD4.2 (analog output, digital internal signal processing)
 analog-out / digital

- The power supply is galvanically isolated inside of the sensor.
- The output signal is galvanically isolated too, that means potential-free.

	Measuring range	resolution	Output Output resistance	Nominal slope	Power supply	Connection
	in ppm	in ppm		in mV/ppm		
CD4.2H-An-M12	0.005...2.000	0.001	analog 0...-2 V (max. -2.5 V)	-1000	9-30 VDC approx. 20-56 mA	5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: power GND PIN4: signal GND PIN5: n. c.
CD4.2N-An-M12	0.05...20.00	0.01	1 kΩ	-100		
CD4.2H-Ap-M12	0.005...2.000	0.001	analog 0...+2 V (max. +2.5 V)	+1000		
CD4.2N-Ap-M12	0.05...20.00	0.01	1 kΩ	+100		

(Subject to technical changes!)

3. CD4.2 (digital output, digital internal signal processing)

- The power supply is galvanically isolated inside of the sensor.
- The output signal is galvanically isolated too, that means potential-free.

	Measuring range in ppm	resolution in ppm	Output Output resistance	Power supply	Connection
CD4.2H-M0c	0.005... 2.000	0.001	Modbus RTU There are no terminating resistors in the sensor.	9-30 VDC approx. 20-56 mA	5-pole M12 plug-on flange Function of wires: PIN1: reserved PIN2: +U PIN3: power GND PIN4: RS485B PIN5: RS485A
CD4.2N-M0c	0.05... 20.00	0.01			

(Subject to technical changes!)

4. CD4.2 4-20 mA (analog output, analog internal signal processing)

A potential-free electrical connection is necessary as the sensor electronic is not equipped with a galvanical isolation.

4.1 Electrical connection: 2 pole terminal clamp

	Measuring range in ppm	resolution in ppm	Output Output resistance	Nominal slope in mA/ppm	Voltage supply	Connection
CD4.2MA0.5	0.005...0.500	0.001	4...20 mA uncalibrated	32.0	12...30 VDC R _L 50Ω...R _L 900Ω	2-pole terminal (2 x 1 mm ²) Recommended: Round cable ∅ 4 mm 2 x 0.34 mm ²
CD4.2MA2	0.005...2.000	0.001		8.0		
CD4.2MA5	0.05...5.00	0.01		3.2		
CD4.2MA10	0.05...10.00	0.01		1.6		
CD4.2MA20	0.05...20.00	0.01		0.8		

(Subject to technical changes!)

4.2 Electrical connection: 5 pole M12 plug-on flange

	Measuring range in ppm	resolution in ppm	Output Output resistance	Nominal slope in mA/ppm	Voltage supply	Connection
CD4.2MA0.5-M12	0.005...0.500	0.001	4...20 mA uncalibrated	32.0	12...30 VDC R _L 50Ω...R _L 900Ω	5-pole M12 plug-on flange Function of wires: PIN1: n. c. PIN2: +U PIN3: -U PIN4: n. c. PIN5: n. c.
CD4.2MA2-M12	0.005...2.000	0.001		8.0		
CD4.2MA5-M12	0.05...5.00	0.01		3.2		
CD4.2MA10-M12	0.05...10.00	0.01		1.6		
CD4.2MA20-M12	0.05...20.00	0.01		0.8		

(Subject to technical changes!)

Spare Parts

Type	Membrane cap	Electrolyte	emery	O-ring
For all CD4.2	M20.2 Art. no. 11011.1	ECD4 • ECD7/W, 100 ml Art. no. 11030	S1 Art. no. 11908	14 x 1.8 NBR Art. no. 11806

(Subject to technical changes!)