


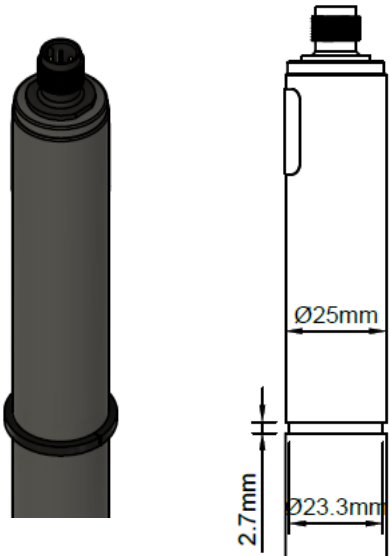
	<h1>TARAtec P10</h1>	
indicator	Peracetic acid	
Application	<p>All kinds of water treatment, also sea water Conductivity acids are tolerated. (e. g. bottle washing machine, CIP-plants) The membrane system is mechanical resistant. The membrane system is highly resistant to surfactants (tensides).</p>	
Measuring system	Membrane covered, amperometric 2-electrode system	
Electronic	<p>Analog version: - voltage output - not galvanically isolated electronics - analog internal data processing - output signal: analog (analog-out/analog)</p> <p>Digital version: - electronic is completely galvanically isolated - digital internal data processing - output signal: analog (analog-out/digital) or digital (digital-out/digital)</p> <p>mA-version: - current output analog - not galvanically isolated electronics - output signal: analog (analog-out/analog)</p>	
Information about the measuring range	<p>The actual slope of a sensor can vary production-related between 65% and 150% of the nominal slope</p> <p>Note: With a slope &gt; 100% the measuring range is reduced accordingly. (Ex.: 150% slope → 67% of the specified measuring range)</p>	
Working temperature	<p>Measuring water temperature: 0 ... +45 °C (no ice crystals in the measuring water)</p>	
	<p>Ambient temperature: 0 ... +55 °C</p>	
Temperature compensation	<p>Automatically, by an integrated temperature sensor sudden temperature changes must be avoided Response time <math>t_{90}</math> = approx. 8 min.</p>	
Max. allowed working pressure	<p>Operation without retaining ring:</p> <ul style="list-style-type: none"> <li>- 0.5 bar</li> <li>- no pressure impulses and/or vibrations</li> </ul>	
	<p>Operation with retaining ring in TARAflow FLC:</p> <ul style="list-style-type: none"> <li>- 1.0 bar,</li> <li>- no pressure impulses and/or vibrations (see option 1)</li> </ul>	

		<h1>TARAtec P10</h1>	
Flow rate (Incoming flow velocity)	approx. 15-30L/h (33 – 66 cm/s) in TARAflow FLC, small flow rate dependence is given		
pH-range	pH 1 – pH 6		
Run-in time	P10H: First start-up approx. 3 h P10N: First start-up approx. 1 h P10L: First start-up approx. 30 min.		
Response time	T <sub>90</sub> : approx. 5 min. at 10 °C T <sub>90</sub> : approx. 1.5 min. at 45 °C		
Zero point adjustment	Not necessary		
calibration	At the device, by analytical determination		
interferences	O <sub>3</sub> : factor 2500 ClO <sub>2</sub> : factor 1 H <sub>2</sub> O <sub>2</sub> : very low influence on the measuring value (reduction of the PAA-signal)		
influence of conductivity acids	1 % sulfuric acid, 1 % nitric acid or 1 % phosphoric acid in the water have no influence to the measuring behaviour		
Absence of the disinfectant	Max. 24 h		
Connection	mV version: 5-pole M12, plug-on flange Modbus version: 5-pole M12, plug-on flange 4-20 mA version: 2-pole terminal or 5-pole M12, plug-on flange		
max. length of sensor cable (depending on internal signal processing)	analog	< 30 m	
	digital	> 30 m are permissible Maximum cable length depends on application	
Protection type	5-pole M12 plug-on flange: IP68 2-pole terminal with mA-hood: IP65		
material	Elastomer membrane, PVC-U, stainless steel 1.4571		
Size	diameter: approx. 25 mm Length: mV version approx. 190 mm (analog signal processing) approx.. 205 mm (digital signal processing) Modbus version approx. 205 mm 4-20 mA version approx. 220 mm (2-pole-terminal) approx. 190 mm (5-pole-M12)		
Transport	+5 ... +50 °C (Sensor, electrolyte, membrane cap)		


	<h1>TARAtec P10</h1>	
storage	Sensor: dry and without electrolyte no limit at +5 ... +40 °C	Electrolyte: in original bottle protected from sunlight at +5 ... +35 °C min. 1 year or until specified EXP-Date
	Membrane cap: in original packing no limit at +5 ... +40 °C (used membrane caps can not be stored)	
	Regular control of the measuring signal, min. once a week The following specifications depend on the water quality: Change of the membrane cap: once a year Change of the electrolyte: every 3 - 6 months	
	EMC tested RoHS compliant	

<p><b>Option 1: Retaining ring</b></p>	<ul style="list-style-type: none"> <li>– When operating with pressures &gt;0.5 bar in TARAflow FLC</li> <li>– Dimensions retaining ring 29 x 23.4 x 2.5 mm, slitted, PETP</li> <li>– Different positions for groove selectable (on request)</li> </ul>	
--	--	--

## Technical Data

### 1. P10 (Analog output, analog internal signal processing)


A potential-free electrical connection is necessary as the sensor electronic is not equipped with a galvanical isolation.

	Measuring range	resolution	Output Output resistance	Nominal slope	Voltage supply	Connection
P10H-M12	0.5...200 ppm	0.1 ppm	0...-2000 mV 1 kΩ	-10 mV/ppm	±5 - ±15 VDC 10 mA	5-pole M12 plug-on flange  Function of wires: PIN1: measuring signal PIN2: +U PIN3: -U PIN4: signal GND PIN5: n. c.
P10N-M12	5...2000 ppm	1 ppm		-1 mV/ppm		
P10L-M12	0.005...2 % (20000 ppm)	0.001 % (10 ppm)		-1000mV/% (-0.1 mV/ppm)		
P10Up2000-M12	5...2000 ppm	1 ppm	0...+2000 mV 1 kΩ	+1 mV/ppm	10 - 30 VDC 10 mA	5-pole M12 plug-on flange  Function of wires: PIN1: measuring signal PIN2: +U PIN3: power GND PIN4: signal GND PIN5: n. c.
P10Up5000-M12	50...5000 ppm	1 ppm		+0.4 mV/ppm		

(Subject to technical changes.)

### 2. P10 (analog output, digital internal signal processing) analog-out / digital


- The power supply is galvanically isolated inside of the sensor.
- The output signal is galvanically isolated too, that means potential-free.

	Measuring range	Resolution	Output Output resistance	Nominal Slope	Power supply	Connection
P10H-An-M12	0.5...200 ppm	0.1 ppm	analog 0...-2 V (max. - 2.5 V) 1 kΩ	-10 mV/ppm	9-30 VDC  approx. 20-56 mA	5-pole M12 plug-on flange  Function of wires: PIN1: measuring signal PIN2: +U PIN3: power GND PIN4: signal GND PIN5: n. c.
P10N-An-M12	5...2000 ppm	1 ppm		-1 mV/ppm		
P10L-An-M12	0.005...2% (20000 ppm)	0.001% (10 ppm)		-1000 mV/% (-0.1 mV/ppm)		
P10H-Ap-M12	0.5...200 ppm	0.1 ppm	analog 0...+2 V (max. +2.5 V) 1 kΩ	+10 mV/ppm		
P10N-Ap-M12	5...2000 ppm	1 ppm		+1 mV/ppm		
P10L-Ap-M12	0.005...2% (20000 ppm)	0.001% (10 ppm)		+1000 mV/% (+0.1 mV/ppm)		

(Subject to technical changes.)

### 3. P10 (digital output, digital internal signal processing)

- The power supply is galvanically isolated inside of the sensor.
- The output signal is galvanically isolated too, that means potential-free.


	Measuring range	Resolution	Output Output resistance	Power supply	Connection
P10H-M0c	0.5...200 ppm	0.1 ppm	Modbus RTU  There are no terminating resistors in the sensor.	9-30 VDC  approx. 20-56 mA	5-pole M12 plug-on flange
P10N-M0c	5...2000 ppm	1 ppm			Function of wires: PIN1: reserved PIN2: +U PIN3: power GND PIN4: RS485B PIN5: RS485A
P10L-M0c	0.005...2% (20000 ppm)	0.001% (10 ppm)			

(Subject to technical changes.)

### 4. P10 4-20 mA (analog output, analog internal signal processing)


A potential-free electrical connection is necessary as the sensor electronic is not equipped with a galvanical isolation.

#### 4.1 Electrical connection: 2 pole terminal clamp

	Measuring range	resolution	Output Output resistance	Nominal slope	Voltage supply	Connection
P10MA-200	0.5...200 ppm	0.1 ppm	4...20 mA  uncalibrated	0.08 mA/ppm	12...30 VDC  R <sub>L</sub> = 50Ω (12V) ... R <sub>L</sub> 900Ω (30V)	2-pole terminal (2 x 1 mm <sup>2</sup> )  Recommended: Round cable Ø 4 mm 2 x 0.34 mm <sup>2</sup>
P10MA-2000	5...2000 ppm	1 ppm		0.008 mA/ppm		
P10MA-5000	50...5000 ppm	1 ppm		0.0032 mA/ppm		
P10MA-2%	0.005...2 % (20000 ppm)	0.001 % (10 ppm)		8.0 mA/% (0.0008 mA/ppm)		
P10MA-5%	0.05...5 % (50000 ppm)	0.01 % (100 ppm)		3.2 mA/% (0.00032 mA/ppm)		

(Subject to technical changes.)

#### 4.2 Electrical connection: 5 pole M12 plug-on flange

	Measuring range	resolution	Output Output resistance	Nominal slope	Voltage supply	Connection
P10MA-200-M12	0.5...200 ppm	0.1 ppm	4...20 mA uncalibrated	0.08 mA/ppm	12...30 VDC  R <sub>L</sub> = 50Ω (12V) ... R <sub>L</sub> 900Ω (30V)	5-pole M12 plug-on flange  Function of wires: PIN1: n. c. PIN2: +U PIN3: -U PIN4: n. c. PIN5: n. c.
P10MA-2000-M12	5...2000 ppm	1 ppm		0.008 mA/ppm		
P10MA-5000-M12	50...5000 ppm	1 ppm		0.0032 mA/ppm		
P10MA-2%-M12	0.005...2 % (20000 ppm)	0.001 % (10 ppm)		8.0 mA/% (0.0008 mA/ppm)		
P10MA-5%-M12	0.05...5 % (50000 ppm)	0.01 % (100 ppm)		3.2 mA/% (0.00032 mA/ppm)		

(Subject to technical changes.)


#### Spare Parts

Type	Membrane cap	Electrolyte	Emery	O-ring
For all P10H	M10.1N with G-holder Art. No. 11046.1	EPS9H/W, 100 ml Art. No. 11025	S2 Art. No. 11906	20 x 1.5 silicone Art. No. 11803
For all P10N				
P10Up2000				
P10Up5000				
For all P10L		EPS9L/W, 100 ml Art. Nr. 11024		
For all P10MA-200		EPS9H/W, 100 ml Art. No. 11025		
For all P10MA-2000				
For all P10MA-5000				
For all P10MA-2%		EPS9L/W, 100 ml Art. No. 11024		
For all P10MA-5%	M10.1D with G-holder Art. No. 11041.1	EPS9L/W, 100 ml Art. No. 11024		

(Subject to technical changes.)

### Slope of P9 and P10 versus pH

Temperature: 25°C / Flow rate: 30 l/h

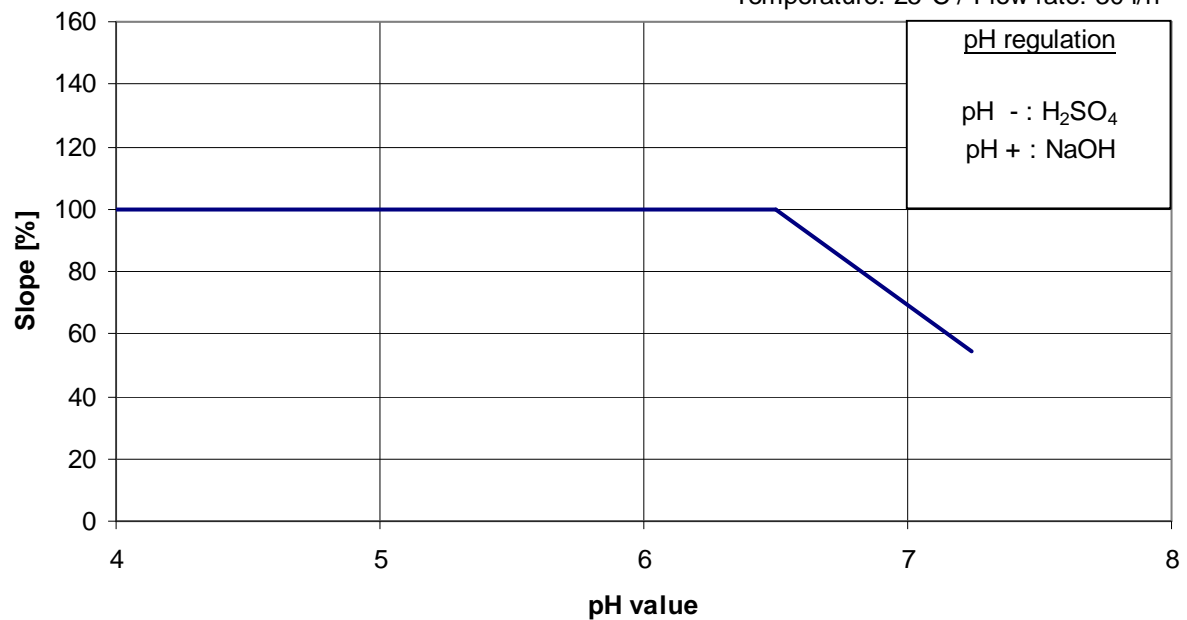

Stichtag: des\_P9\_Sensors\_b\_abhängigkeit\_vom\_pH-Wert.xls