


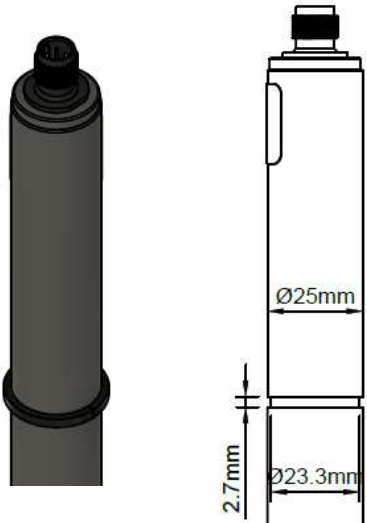
	<h1>TARAtec</h1> <h2>P9.3</h2>				
Indicator	Peracetic acid				
Application	All kinds of water treatment Tensides and conductivity acids are tolerated (e. g. bottle washing machine, CIP-plants)				
Measuring system	Membrane covered, amperometric 2-electrode system				
Electronic	<p>Analog version:</p> <ul style="list-style-type: none"> - voltage output - not galvanically isolated electronics - analog internal data processing - output signal: analog (analog-out/analog) <p>Digital version:</p> <ul style="list-style-type: none"> - electronic is completely galvanically isolated - digital internal data processing - output signal: analog (analog-out/digital) or digital (digital-out/digital) <p>mA-version:</p> <ul style="list-style-type: none"> - current output analog - not galvanically isolated electronics - output signal: analog (analog-out/analog) 				
Information about the measuring range	<p>The actual slope of a sensor can vary production-related between 65% and 150% of the nominal slope</p> <p>Note: With a slope > 100% the measuring range is reduced accordingly. (Ex.: 150% slope → 67% of the specified measuring range)</p>				
Accuracy After calibration at repeat conditions (25 °C, in drinking water) from full scale value	<p>Measuring range 2000 mg/L:</p> <table border="0"> <tr> <td>at 400 mg/l</td> <td><2%</td> </tr> <tr> <td>at 1600 mg/l</td> <td><3%</td> </tr> </table>	at 400 mg/l	<2%	at 1600 mg/l	<3%
at 400 mg/l	<2%				
at 1600 mg/l	<3%				
Working temperature	Measuring water temperature: 0 ... +60 °C (no ice crystals in the measuring water)				
	Ambient temperature: 0 ... +55 °C				
Temperature compensation	Automatically, by an integrated temperature sensor sudden temperature changes must be avoided T ₉₀ : approx. 3.5 min.				
Max. allowed working pressure	Operation without retaining ring: <ul style="list-style-type: none"> – 0.5 bar – no pressure impulses and/or vibrations 				
	Operation with retaining ring in TARAflow FLC: <ul style="list-style-type: none"> – 1.0 bar, – no pressure impulses and/or vibrations (see option 1) 				
Flow rate (Incoming flow velocity)	approx. 15-30L/h (15 – 30 cm/s) in TARAflow FLC, small flow rate dependence is given				
pH-range	pH 1 – pH 8 (see Diagram „Slope of TARAtec P9.3 and P10.1 versus pH“)				


	<h1>TARAtec</h1> <h2>P9.3</h2>	
Run-in time	Measuring range 200 mg/L: First start-up approx. 3 h Measuring range 2000 mg/L: First start-up approx. 1 h Measuring range 20000 mg/L: First start-up approx. 30 min.	
Response time	T ₉₀ : approx. 3.5 min. at 10 °C approx. 45 sec. at 50 °C	
Zero point adjustment	Not necessary	
Calibration	At the device, by analytical determination	
Interferences	O ₃ : high increase of the measuring value ClO ₂ : increases the measuring value H ₂ O ₂ : very low influence on the measuring value (reduce of the PAA-signal)	
Influence of conductivity acids	1 % sulfuric acid, 1 % nitric acid or 1 % phosphoric acid in the water have no influence to the measuring behaviour	
Absence of the disinfectant	Max. 24 h	
Connection	mV version: 5-pole M12, plug-on flange Modbus version: 5-pole M12, plug-on flange 4-20 mA version: 2-pole terminal or 5-pole M12, plug-on flange	
Max. length of sensor cable (depending on internal signal processing)	analog	< 30 m
	digital	> 30 m are permissible Maximum cable length depends on application
Protection type	5-pole M12 plug-on flange: IP68 2-pole terminal with mA-hood: IP65	
Material	Elastomer membrane, PEEK, stainless steel 1.4571	
Size	diameter: approx. 25 mm Length: mV version approx. 190 mm (analog signal processing) approx.. 205 mm (digital signal processing) Modbus version approx. 205 mm 4-20 mA version approx. 220 mm (2-pole-terminal) approx. 190 mm (5-pole-M12)	
Transport	+5 ... +50 °C (Sensor, electrolyte, membrane cap)	

	<h1>TARAtec</h1> <h2>P9.3</h2>	
Storage	Sensor:	dry and without electrolyte no limit at +5 ... +40 °C
	Electrolyte:	in original bottle protected from sunlight at +5 ... +35 °C min. 1 year or until specified EXP-Date
	Membrane cap:	in original packing no limit at +5 ... +40 °C (used membrane caps cannot be stored)
Maintenance	Regularly control of the measuring signal, min. once a week The following specifications depend on the water quality: Change of the membrane cap: once a year Change of the electrolyte: every 3 - 6 months	
	EMC tested RoHS compliant	

Option 1: Retaining ring	<ul style="list-style-type: none"> – When operating with pressures >0.5 bar in TARAflow FLC – Dimensions retaining ring 29 x 23.4 x 2.5 mm, slitted, PETP – Different positions for groove selectable (on request) 	
-------------------------------------	--	--

Technical Data

1. P9.3 (Analog output, analog internal signal processing)


	Measuring range	Resolution	Output Output resistance	Nominal slope	Voltage supply	Galvanic isolation required in the measuring device/controller *	Connection
P9.3H-M12	0...200 ppm	0.1 ppm	0...-2000 mV 1 kΩ	-10 mV/ppm	±5 - ±15 VDC 10 mA	yes	5-pole M12 plug-on flange
P9.3N-M12	5...2000 ppm	1 ppm		-1 mV/ppm			Function of wires: PIN1: measuring signal PIN2: +U PIN3: -U PIN4: signal GND PIN5: n. c.
P9.3L-M12	0.005...2 % (20000 ppm)	0.001 % (10 ppm)		-1000mV/% (-0.1 mV/ppm)			
P9.3Up2000-M12	5...2000 ppm	1 ppm	0...+2000 mV 1 kΩ	+1 mV/ppm	10 - 30 VDC 10 mA		5-pole M12 plug-on flange
P9.3Up5000-M12	50...5000 ppm	1 ppm		+0.4 mV/ppm			Function of wires: PIN1: measuring signal PIN2: +U PIN3: power GND PIN4: signal GND PIN5: n. c.

* for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

2. P9.3 (analog output, digital internal signal processing)


analog-out / digital

	Measuring range	Resolution	Output Output resistance	Nominal slope	Voltage supply	Galvanic isolation required in the measuring device/controller *	Connection
P9.3H-An-M12	0 ... 200 ppm	0.1 ppm	analog 0...-2 V (max. -2.5 V) 1 k Ω	-10 mV/ppm	9-30 VDC approx. 7-30 mA	no	5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: power GND PIN4: signal GND PIN5: n. c.
P9.3N-An-M12	5 ... 2000 ppm	1 ppm		-1 mV/ppm			
P9.3L-An-M12	0.005 ... 2 % (20000 ppm)	0.001 % (10 ppm)		-1000mV/% (-0.1 mV/ppm)			
P9.3H-Ap-M12	0 ... 200 ppm	0.1 ppm	analog 0...+2 V (max. +2.5 V) 1 k Ω	+10 mV/ppm			
P9.3N-Ap-M12	5 ... 2000 ppm	1 ppm		+1 mV/ppm			
P9.3L-Ap-M12	0.005 ... 2 % (20000 ppm)	0.001 % (10 ppm)		+1000mV/% (+0.1 mV/ppm)			

 * for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

3. P9.3 (digital output, digital internal signal processing)


	Measuring range	Resolution	Output Output resistance	Voltage supply	Galvanic isolation required in the measuring device/controller *	Connection
P9.3H-M0c	0 ... 200 ppm	0.1 ppm	Modbus RTU There are no terminating resistors in the sensor.	9-30 VDC approx. 7-30 mA	no	5-pole M12 plug-on flange
P9.3N-M0c	5 ... 2000 ppm	1 ppm				Function of wires: PIN1: reserved PIN2: +U PIN3: power GND PIN4: RS485B PIN5: RS485A
P9.3L-M0c	0.005 ... 2 % (20000 pm)	0.001 % (10 ppm)				

* for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

4. P9.3 4-20 mA (analog output, analog internal signal processing)


4.1 Electrical connection: 2 pole terminal clamp

	Measuring range	Resolution	Output Output resistance	Nominal slope	Voltage supply	Galvanic isolation required in the measuring device/controller *	Connection
P9.3MA-200	0 ... 200 ppm	0.1 ppm	4...20 mA uncalibrated	0.08 mA/ppm	12...30 VDC R _L = 50Ω (12V)... 900Ω (30V)	yes	2-pole terminal (2 x 1 mm ²)
P9.3MA-2000	5 ... 2000 ppm	1 ppm		0.008 mA/ppm			Recommended: Round cable Ø 4 mm 2 x 0.34 mm ²
P9.3MA-2%	0.005 ... 2 % (20000 ppm)	0.001 % (10 ppm)		8.0 mA/% (0.0008 mA/ppm)			

* for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

4.2 Electrical connection: 5 pole M12 plug-on flange

	Measuring range	Resolution	Output Output resistance	Nominal slope	Voltage supply	Galvanic isolation required in the measuring device/controller *	Connection
P9.3MA-200-M12	0 ... 200 ppm	0.1 ppm	4...20 mA uncalibrated	0.08 mA/ppm	12...30 VDC $R_L = 50\Omega (12V) \dots 900\Omega (30V)$	yes	5-pole M12 plug-on flange Function of wires: PIN1: n. c. PIN2: +U PIN3: -U PIN4: n c. PIN5: n. c.
P9.3MA-2000-M12	5 ... 2000 ppm	1 ppm		0.008 mA/ppm			
P9.3MA-2%-M12	0.005 ... 2 % (20000 ppm)	0.001 % (10 ppm)		8.0 mA/% (0.0008 mA/ppm)			

* for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

Spare Parts

Type	Membrane cap	Electrolyte	Emery	O-ring
P9.3 not P9.3L and P9.3MA-2%	M9.3N Art. no. 11058	EPS9H/W, 100 ml Art. no. 11025	S2 Art. no. 11906	20 x 1.5 silicone Art. no.. 11803
P9.3L P9.3MA-2%		EPS9L/W, 100 ml Art. no. 11024		

(Subject to technical changes!)

Slope of TARAtec P9.3 and P10.1 versus pH

Temperature: 25°C / Flow rate: 30 L/h

